

# 1.27mm (0.05") Pin Header

Dual Row 50 Contacts  
Straddle Mount

0088D Series




## APPLICATION AND FEATURES

- Standoffs facilitate post solder cleaning.
- Mates with P.C.Board connectors such as 0057D & 0156 series.

## SPECIFICATIONS

Current Rating: 1 Amp  
 Insulator resistance: 5000 Megohms min.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40° to +105°C  
 Max Processing Temp: 230° for 30~60 seconds  
 (260° for 10 seconds)  
 Contact Material: Phosphor bronze  
 Insulator Material: Polyester, UL 94V-0  
 © Standard: Nylon-6T

Recommended P.C.Board Layout

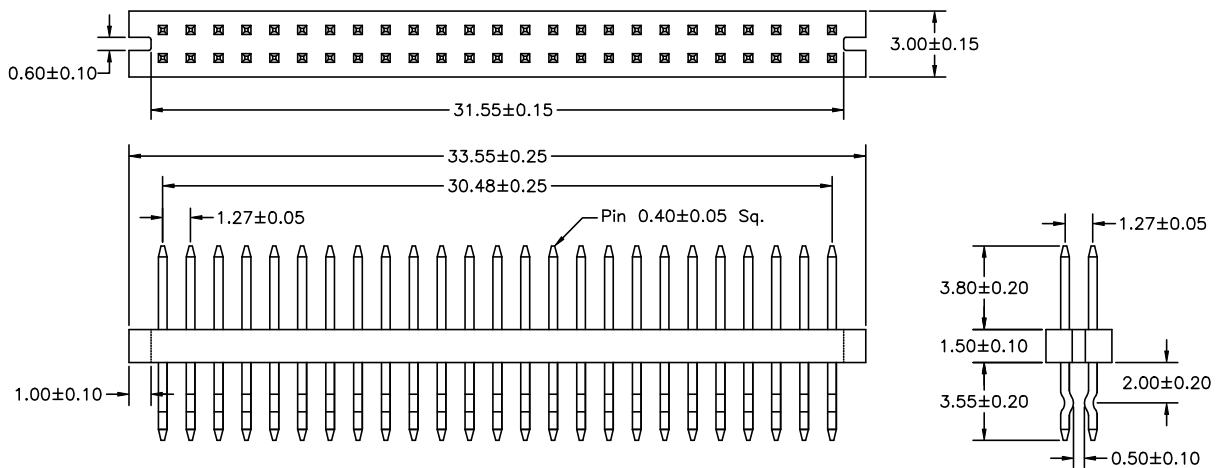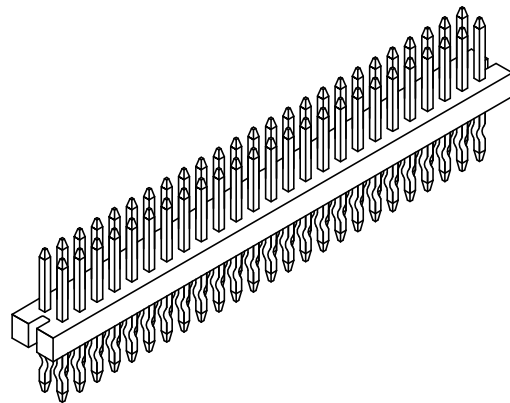

## Order Information 0088D Series

Example: 0088D-50-02-0.5-A/B

Series No.	Number of Contacts	Contact Plating	Board Space	Pin Length mm	
0088D	50	Gold Plated	0.5mm	A	B
		Flash 02	* per customer request	3.8	3.55
		Over 60μ" plated of nickel			