

1.27mm×1.27mm (0.05"×0.05") SMD Female Bottom Entry Dual Row 10 to 100 Contacts For Square Post Mating


0155D Series

APPLICATION AND FEATURES

1. Side stackable (on unbroken edges).
2. Variable pin length, gold or tin plated.
3. Mates with P.C.Board connectors such as 0055D,0086D & 0081D,0083D series.

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40° to +105°C
 Max Processing Temp: 230° for 30~60 seconds
 (260° for 10 seconds)
 Contact Material: Phosphor bronze
 Insulator Material: Polyester,UL 94V-0
 ©Standard:L.C.P

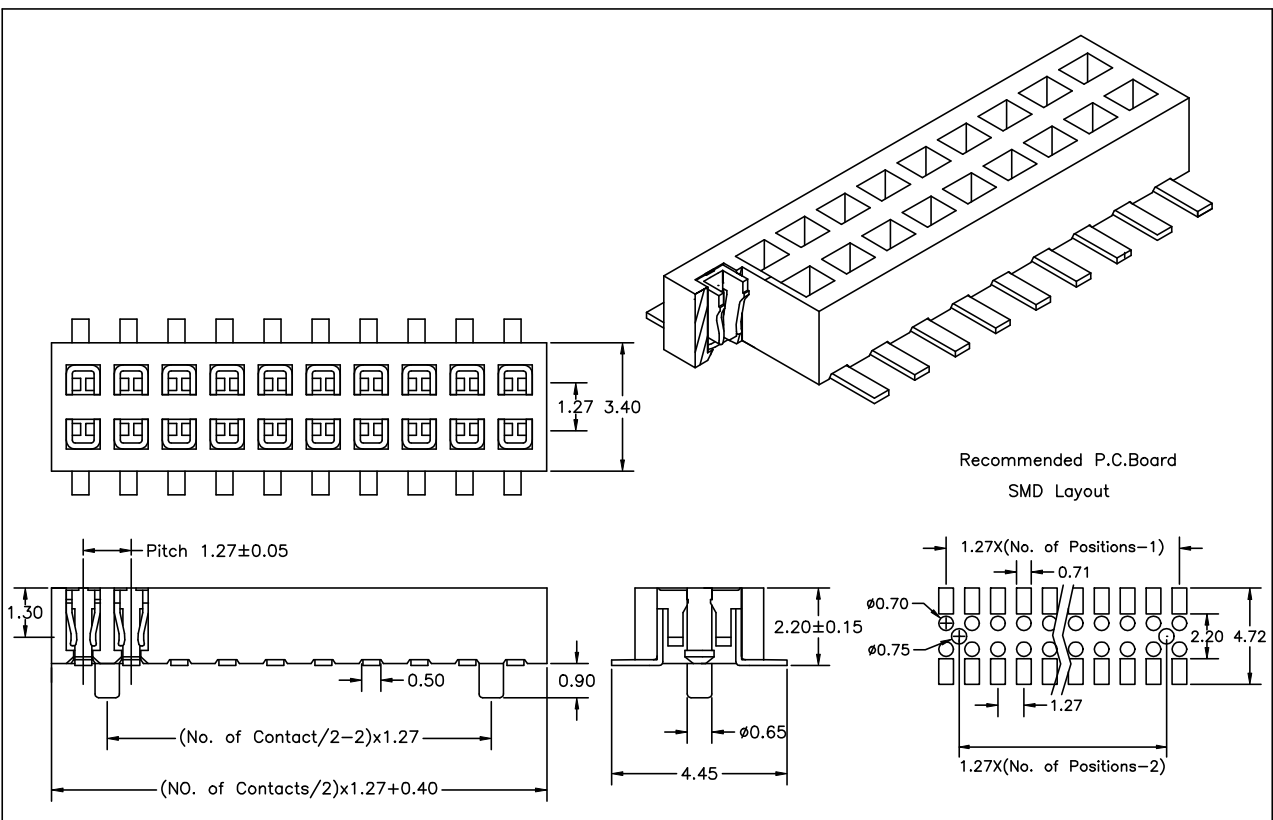

Order Information 0155D Series

Example: 0155D-40-02-1

| Series No. | Number of Contacts | Contact Plating | Locating Peg |
|------------|--------------------|-----------------|--------------------|
| 0155D | 10 to 100 Contacts | Tin Plated 01 | W/O Locating peg 0 |
| | | Gold Plated | W Locating peg 1 |
| | | Flash 02 | |
| | | 10 μ" 10 | |
| | | 30 μ" 30 | |