

2.0 × 2.0mm (0.079" × 0.079") IDC Socket

For 1.0mm Center Flat Ribbon Cable





1101 Series

APPLICATION AND FEATURES

1. 1101 Series Flat Cable connector is designed for which require small and light internal connector.
2. High quality dual beam phosphor bronze contacts.
3. Mate with 2.0mm pitch and □ 0.5mm pin header such as 1202,1302,1205 & 1204D series.

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40° to +105°C
 Contact Material: Phosphor bronze
 Insulator Material: Polyester,UL 94V-0
 ©Standard:P.B.T

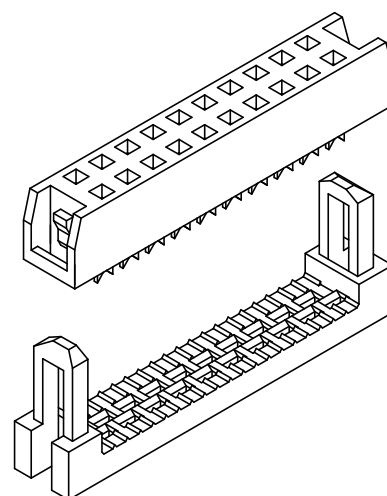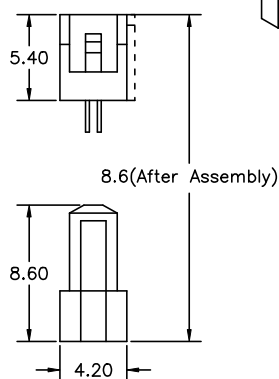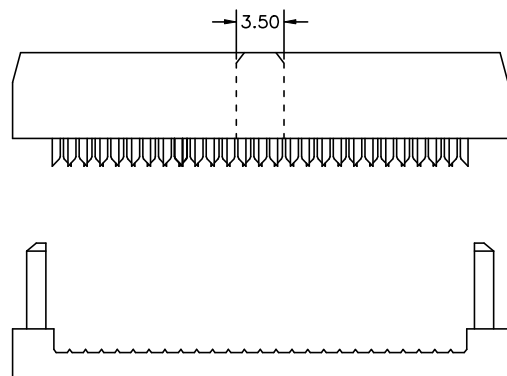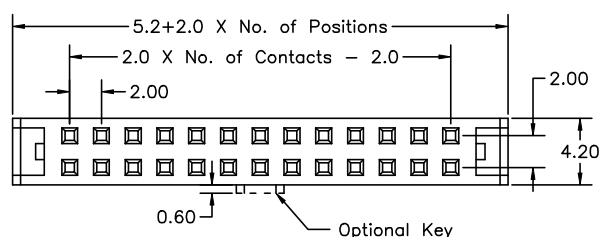

Order Information 1101 Series

Example: 1101 - 34 - 02

Series No.	Number of Contacts	Contact Plating
1101K W/ Key	10,14,16,20,24,26,34, 40,44,50	Tin Plated 01
1101 W/O Key	4,6,8,10,12,14,16,18 20,22,24,26,28,30,32 34,36,38,40,44,48,50 54,56,60,62,64,68	Gold Plated
		Flash 02
		10 μ" 10
		30 μ" 30