

2.0mm (0.079") SMT Top Entry Female Header (Double Row)


1418 Series

APPLICATION AND FEATURES

1. Low Profile: 2.8mm height.
2. High quality dual beam phosphor bronze contacts.
3. Designed for board to board small spacing interconnection.
4. Mating with 2.0mm pitch □ 0.5mm Pin Headers, such as 1202,1204D & 1205 series.

SPECIFICATIONS

Current Rating:	1 Amp
Insulator resistance:	5000 Megohms min.
Contact resistance:	20 m ohm Max.
Dielectric withstanding:	AC 500 V
Operating Temperature:	-40° to +105°C
Max Processing Temp:	230° for 30~60 seconds (260° for 10 seconds)
Contact Material:	Phosphor bronze
Insulator Material:	Polyester, UL 94V-0
	©Standard: Nylon-6T

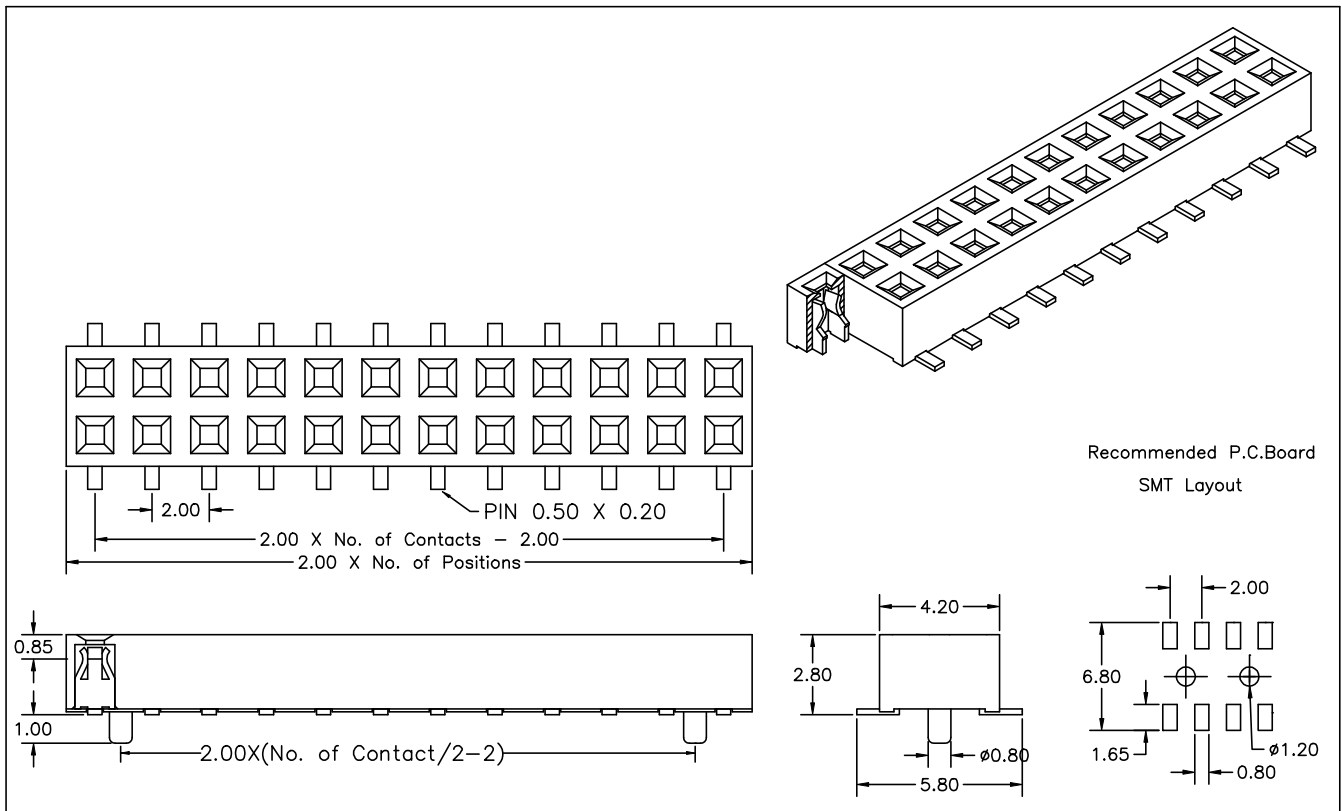

Order Information 1418 Series

Example: - - -

Series No.	Number of Contacts	Contact Plating	Locating Peg
<input type="text" value="1418"/>	<input type="text" value="10 to 60 Contacts"/>	Tin Plated <input type="text" value="01"/>	W/O Locating peg <input type="text" value="0"/>
		Gold Plated <input type="text" value="02"/>	W Locating peg <input type="text" value="1"/>
		Flash <input type="text" value="10"/>	
		10 μ" <input type="text" value="30"/>	
		30 μ" <input type="text" value=""/>	