

# 2.54mm (0.1") Pin Header

Single Row  
U-Type Angle



2201-DR Series

## APPLICATION AND FEATURES




1. U-Type series headers are ideal for board stacking application.
2. Notches for easy breakable.

## SPECIFICATIONS

Current Rating: 3 Amps  
 Insulator resistance: 5000 Megohms min.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40° to +105°C  
 Contact Material: Brass  
 Insulator Material: P.B.T+30% Glass Fiber, UL 94V-0

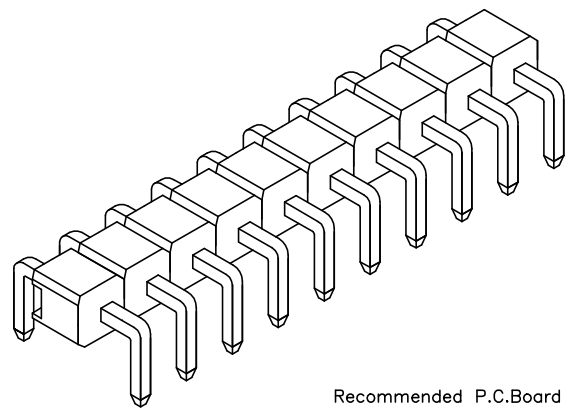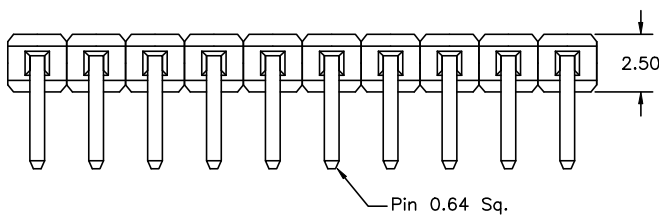

Recommended P.C.Board Hole Layout

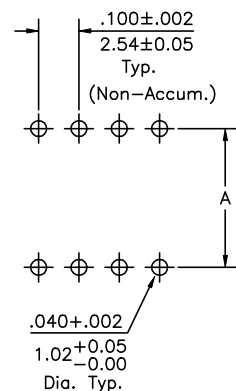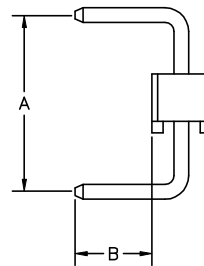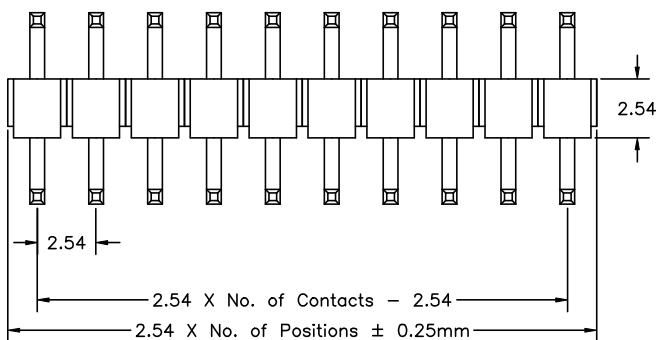

## Order Information 2201-DR Series

Example: 2201 - 20 - DR - 01 - A/B

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm	
2201	02 to 40 Contacts	U-Type Angle <span style="border: 1px solid black; padding: 2px;">DR</span>	Tin Plated <span style="border: 1px solid black; padding: 2px;">01</span>	A	B
			Gold Plated	<span style="border: 1px solid black; padding: 2px;">7.62</span>	<span style="border: 1px solid black; padding: 2px;">3.3</span>
			Flash <span style="border: 1px solid black; padding: 2px;">02</span>		
			10 μ" <span style="border: 1px solid black; padding: 2px;">10</span>		
			30 μ" <span style="border: 1px solid black; padding: 2px;">30</span>		