

0.8mm (0.0315) SMT Male Header






702 Series

APPLICATION AND FEATURES

1. High quality phosphor bronze contacts.
2. Designed for board to board small spacing interconnection.

SPECIFICATIONS

Voltage Rating:	50 V
Current Rating:	0.5 Amps
Insulator resistance:	100 Megohms min.
Contact resistance:	40 m ohms max.
Dielectric withstanding:	AC 500 V
Operating Temperature:	-20° to +105°C
Contact Material:	Phosphor bronze
Insulator Material:	HTN/Nylon-6T,UL 94V-0

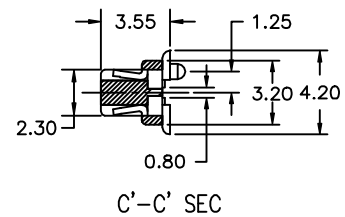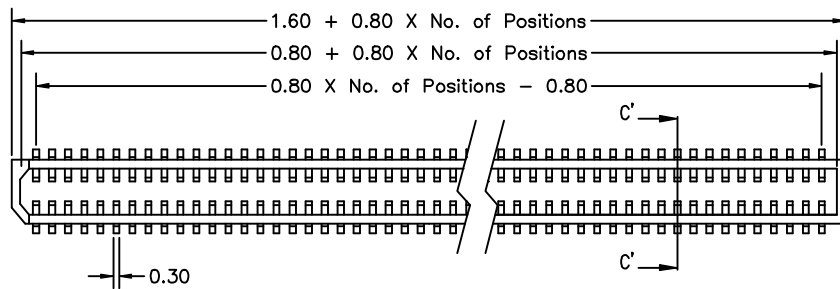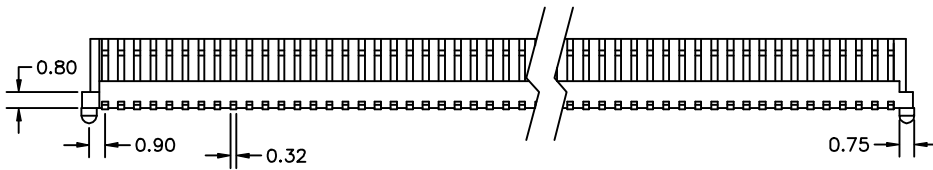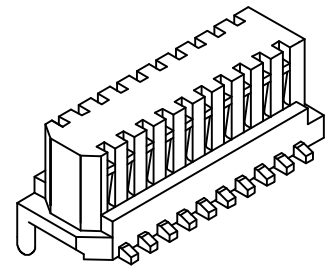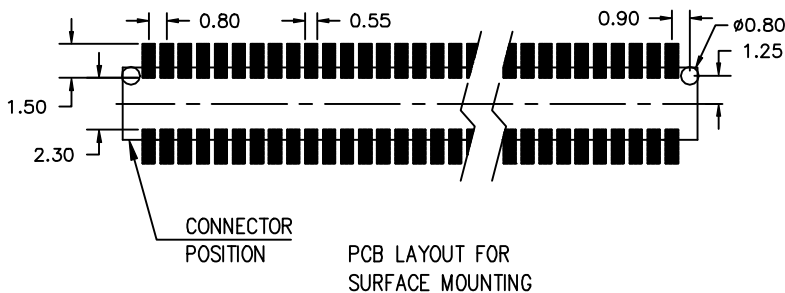

Order Information 702 Series

Example: 702 - 48 - 02 - 3.55

Series No. 702	Number of Contacts 10 to 100 Contacts	Contact Plating Gold Plated Flash 02	Profile Height mm 3.55
-------------------	--	--	---------------------------